



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

**0 338 558
A2**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89107134.2

(51) Int. Cl.⁴: **H04L 11/20**

(22) Date of filing: 20.04.89

(30) Priority: 21.04.88 JP 99938/88
31.08.88 JP 219364/88

(43) Date of publication of application:
25.10.89 Bulletin 89/43

(84) Designated Contracting States:
DE FR GB SE

(71) Applicant: **NEC CORPORATION**
33-1, Shiba 5-chome, Minato-ku
Tokyo 108(JP)

(72) Inventor: Takeuchi, Takao c/o NEC
Corporation
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)
Inventor: Suzuki, Hiroshi c/o NEC Corporation
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)
Inventor: Iwasaki, Susumu c/o NEC
Corporation
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)
Inventor: Nagano, Hiroshi c/o NEC
Corporation
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)
Inventor: Suzuki, Toshio c/o NEC Corporation
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)


(74) Representative: **Vossius & Partner**
Siebertstrasse 4 P.O. Box 86 07 67
D-8000 München 86(DE)

(54) **Packet switch suitable for integrated circuit implementation.**

EP 0 338 558 A2 (57) The invention relates to a packet switch for exchanging packets received over a plurality of input lines and outputting exchanged packets, to a plurality of output lines, comprising:
multiplexing means for time-division multiplexing the packets received over said plurality of input lines to multiplexed packets;
address detecting means for detecting an address of each packet in the multiplexed packets to produce a destination address;
write address generating means responsive to the destination address for generating write address;
read address generating means for sequentially generating read addresses;

memory means constituted by a plurality of memory areas individually associated with said plurality of output lines, said memory means responsive to said write address for storing each packet of the multiplexed packets in any of said memory areas, and responsive to said read addresses for producing exchanged multiplexed packets by reading the stored packets; and
demultiplexing means for demultiplexing said exchanged multiplexed packets into said exchanged packets and delivering them to said plurality of output lines.

Fig. 6

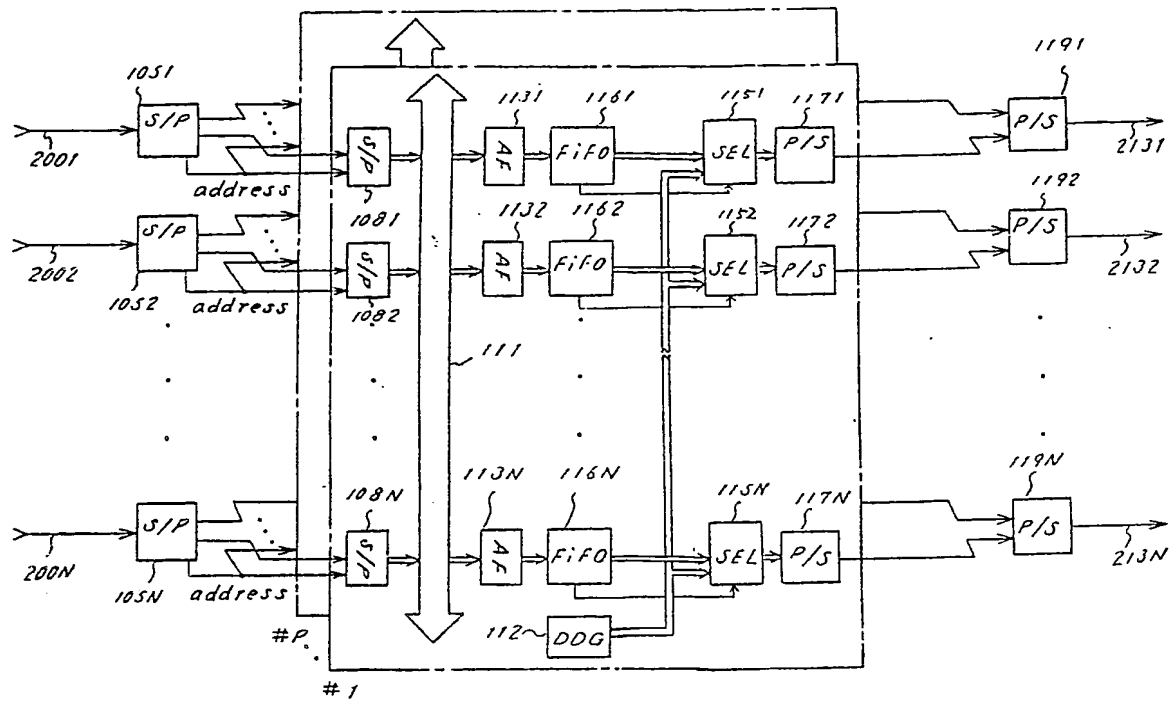

PACKET SWITCH SUITABLE FOR INTEGRATED CIRCUIT IMPLEMENTATION

The present invention relates to a packet switch for high-speed packet communications.

In parallel with the rapid progress in the optical fiber transmission and high-speed VLSI (Very Large Scale Integrated Circuit) technologies, there is an increasing demand for new communication services of the kind using extremely fine pictures, for example. While broadband ISDN'S (Integrated Services Digital Networks) are available as means for handling a plurality of different kinds of information such as voice and pictures collectively, how to multiplex and switch such various kinds of information is a critical consideration. STM (Synchronous Transfer Mode) switching scheme and ATM (Asynchronous Transfer Mode) switching scheme have been proposed to implement the multiplexing and switching system of broadband ISDN'S.

With ATM switching scheme, a motion picture, voice or similar continuous data and a still picture or similar burst data are packetized into fixed length packets and the packets are exchanged. The ATM switching scheme does not require that the terminal equipment and transmission channels be synchronous and be provided with the same data rate. This kind of switching scheme is therefore advantageous over STM switching scheme as to the ease of system expansion and development. An example of packet switches applicable to ATM switching scheme has been taught by Thomas et al in a paper entitled "ASYNCHRONOUS TIME-DIVISION TECHNIQUES: AN EXPERIMENTAL PACKET NETWORK INTEGRATING VIDEO COMMUNICATION", International Switching Symposium, (ISS) '84 Florence, 7-11 May 1984, Session 32 C, Paper 2 (Reference 1). As described later in detail, the packet switch disclosed in this paper has a single buffer memory which is shared by multiple input lines and multiple output lines, and it switches packets by controlling the write and read addresses of the buffer memory. The address control of the buffer memory is effected by using address queues which are assigned to individual output lines, a waiting address queue which shows addresses of stored packet, an idle address queue which shows idle areas of the memory, etc. While this system can be implemented with a relatively small buffer memory capacity because multiple output lines share the memory, it has required complicated control for the shared use of the memory. Specifically, the idle address queue and the waiting address queues associated with the individual output lines are required, and addresses have to be interchanged between the idle address queue and the waiting address queues every time a packet is written in or read out of the buffer memory.

Moreover, when a certain address in a queue is lost or doubled by noise or some malfunction, there occurs in the buffer memory an unused area or, in the worst case, false data is overwritten on a packet to delete the latter or a packet is fed out to an unexpected output line. Such occurrences cannot be eliminated without resorting to extra means for detecting unusual conditions and, because the detection is difficult, the processing is complicated.

It is therefore an object of the present invention to provide a packet switch which is easy to control and highly reliable.

It is another object of the present invention to provide a packet switch configuration which can be readily implemented as an integrated circuit.

In accordance with the present invention, a packet switch for exchanging packets received over a plurality of input lines and outputting exchanged packets, to a plurality of output lines, comprising: multiplexing means for time-division multiplexing the packets received over said plurality of input lines to multiplexed packets, address detecting means for detecting an address of each packet in the multiplexed packets to produce an destination address, write address generating means responsive to the destination address for generating write address, read address generating means for sequentially generating read addresses, memory means constituted by a plurality of memory areas individually associated with said plurality of output lines, said memory means responsive to said write address for storing each packet of the multiplexed packets in any of said memory areas, and responsive to said read addresses for producing exchanged multiplexed packets by reading the stored packets, and demultiplexing means for demultiplexing said exchanged multiplexed packets into said exchanged packets and delivering them to said plurality of output lines.

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description taken with the accompanying drawings in which:

Fig. 1 is a schematic block diagram showing a prior art packet switch;

Fig. 2 is a schematic block diagram showing a first embodiment of the present invention;

Fig. 3 is a schematic block diagram showing a second embodiment of the present invention;

Fig. 4 is a schematic block diagram showing a third embodiment of the present invention;

Fig. 5 is a schematic block diagram showing a fourth embodiment of the present invention;

Fig. 6 is a schematic block diagram showing a specific LSI configuration of the packet switch shown in Fig. 4;

Figs. 7a to 7c are diagrams demonstrating the operation of the packet switch shown in Fig. 6;

Fig. 8 is a schematic block diagram showing a first modification of the construction shown in Fig. 6;

Fig. 9 is a schematic block diagram showing a second modification of the Fig. 6 construction; and

Fig. 10 is a schematic block diagram showing a third modification of the Fig. 6 construction.

In the figures, the same components and structural elements are designated by like reference numerals.

To better understand the present invention, a brief reference will be made to a specific construction of the previously mentioned packet switch proposed by Thomas et al., shown in Fig. 1. In the figure, various kinds of data each having a predetermined packet configuration of a fixed length come in over a plurality of input lines 2001 to 200N. A multiplexer 202 receives all of the packets coming in over the input lines 2001 to 200N and multiplexes them on a packet basis. Assuming that the bit rate of each input line is V (bit/s) and that the number of input lines is N, the bit rate of the multiplexed packet is VN (bit/s). The multiplexed packet outputted by the multiplexer 202 is fed to a buffer memory 203 and an address filter 204. In response, the address filter 204 extracts output line information (output line address) associated with the arrived packet and applies it to a selector 208, while delivering a write enable signal WE to the buffer memory 203. A write address queue 205 storing the addresses of unoccupied or empty areas of the buffer memory 203 feeds to the buffer memory 203 and the selector 208 a write address. The buffer 203 stores the packet in response to the write address and the write enable signal WE. Connected to the selector 203 are read address queues 207 which are associated with individual output lines 213 and may each be implemented by a First-in First-out (FiFo) memory. The selector 208 delivers the write address from the write address queue 205 to one of the read address queues 207 which is associated with the output line address fed from the address filter 204.

Implemented as a dual port memory, for example, the buffer memory 203 is constructed such that packets are read out independently of packet writing in response to a read clock which is fed from the output line side. A counter 209 counts the read clock and cyclically produces the output line address.

A selector 210 is responsive to the output of

the counter 209 to select any one of the read address queues 207. When any of the address queues 207 which is selected by the selector 210 does not store any addresses to be read, it produces a special address (dummy address). For the dummy address, use may be made of any numerical value which is never used for the addresses of the buffer memory 203 by way of example.

A dummy packet generator 211 receives the read address of the buffer memory 203 via the selector 210 and determines whether it is a dummy address or not. If the read address is a dummy address, the dummy packet generator 211 does not read a packet out of the buffer memory 203 and, instead, delivers a 'dummy packet' which is used for timing extraction and synchronization of the system, to a demultiplexer 212. If the read address is not a dummy address, the dummy packet generator 211 applies the value of the read address to the buffer memory 203 together with a read enable signal RE so as to read out a packet. The address from which the packet has been read and is therefore empty is written in the write address queue 205. The demultiplexer 212 demultiplexes the packets from the buffer memory 203 or the dummy packet generator 211 into the output lines 2131 to 213N. The procedure described above is repeated to execute packet switching. While this prior art packet switch has a single buffer memory which is shared by a plurality of output lines and is therefore successful in reducing the required capacity of a buffer memory, it renders the address control complicated, as discussed earlier.

Referring to Fig. 2, a first embodiment of the packet switch in accordance with the present invention is shown. In the figure, fixed length packets arrive at input lines 2001 to 200N on a time division basis. A multiplexer 202 multiplexes those packets on a time division basis and delivers the multiplexed packets to a buffer memory 103 and a write address controller 104. The buffer memory 103 is divided into N memory areas each being associated with a different output line of N output lines 2131 - 213N. These memory areas may have the same size and may be provided with addresses in the same manner, for example. The write address controller 104 includes an address filter 204 for extracting from the input packet the destination address which is associated with the destined output line. More specifically, the address filter 204 determines to which output line the input packet should be directed and, for example, produces an output line number indicating the particular output line. The output line number is delivered to the buffer memory 103 and a selector 106. Connected to the input of the selector 106 are write address counters or write address pointers 1071 to 107N

associated with the individual output lines 2131 to 213N, and each generates a write address of the associated memory area of the buffer memory 103. In response to the output line number from the address filter 204, the selector 106 selectively feeds to the buffer memory 103 a value of the associated counter as a write address. Hence, the packet is written in a particular address of a particular area as designated by the write address from the selector 106 and the output line number from the address filter 204. The output line number from the address filter 204 is also fed to a selector 109. In response, the selector 109 selectively feeds an externally derived increment clock 112 to the counters 1071 to 107N to increment their contents of the counters.

On the other hand, packet reading is performed independently of the packet writing in response to a read clock which is fed from the output line side. A counter 108 counts the incoming read clock and sends its output to a comparing circuit 110. A read controller 105 comprises two selectors 111 and 114, and read address counters 1131 to 113N. The comparing circuit 110 compares the write addresses of the counters 1071 to 107N and the read addresses of the counters 1131 to 113N in response to the value of the counter 108. When the value of one of the read address counters 1131 to 113N and that of the corresponding one of the write address counters 1071 to 107N are the same, a packet to be read out does not exist in the memory area associated with the output line as designated by the counter 108. In this case, the comparing circuit 110 commands a dummy packet generator 211 to generate a dummy packet. Meanwhile, when the values of the read and write counters are not the same, the comparing circuit 110 delivers the value of the counter 108 to the buffer memory 103, selectors 111, 114. The selector 111 selects any one of the counters 1131 to 113N which is indicated with the value of the counter 108. Hence, a packet is read out of a particular address of a particular memory area of the buffer memory 103 as designated respectively by the value of particular one of the counters 1131 to 113N and the value of the counter 108.

The packets read out of the buffer memory 103 or the dummy packets are fed to a demultiplexer 212. The demultiplexer 212 demultiplexes the packets into an individual packet, which is supplied to the output line indicated by the value of the counter 108. The selector 114, in response to the output of the counter 108, selectively supplies an increment clock pulse to the counters 1131 to 113N to increment their contents.

In the illustrative embodiment, adjustment is of course made such that the packet read clock and the operation clock of the demultiplexer 212 are

coincident, and such that the area for reading out a packet and the output line to which the demultiplexer 212 distributes the packet accurately correspond to each other.

Packet switching is accomplished by the packet writing and packet reading described above.

An advantage attainable with this embodiment is that since the buffer memory 103 is divided into a plurality of memory areas each being associated with a different output line, the addresses of the individual areas can be controlled by counters without a complicated address exchange which is required in the prior art.

Referring to Fig. 3, a second embodiment of the present invention is shown which assigns independent buffer memories to the individual output lines and performs address control line by line. In the figure, packets coming in over a plurality of input lines 2001 to 200N are multiplexed by the multiplexer 202 by the same procedure as in the first embodiment of Fig. 2. The multiplexed packet is fed to buffer units 2501 to 250N each being individually assigned to a different output line. Each buffer unit has an address filter 120, an address controller 124, a buffer memory 122, and a dummy packet generator 130. The address filter 120 detects the destination address from the packet and sends the packet to the buffer memory 122 when the detected address represents its own address of the unit 2501. The address filter 120 also delivers a write enable signal to the address controller 124 upon the detection of the destination address of the unit 2501. The address controller 124 has a write address counter or pointer 126, a read address counter or pointer 128 and comparator 127. In response to the write enable signal from the address filter 120, the write address counter 126 delivers the write address to the buffer memory 122 having a FiFo configuration, then incrementing the write address counter 126 by 1.

On the other hand, packets are read out of the buffer memories 122 on the output line 2131 in response to, for example, a read clock which is generated by a clock pulse generator, not shown. The comparator 127 of the address controller 124 compares the read address of the counter 128 and the write address of the counter 126 upon reception of the read clock pulse.

If the both read and write addresses are different with each other, the comparator 127 feeds a read control signal to the read address counter 128. In response to the read control signal, the read address counter 128 supplies the read address to the buffer memory 122 together with a read enable signal and increments its own value by one. If the read address from the counter 128 is identical with the write address from the counter 126, the comparator 127 delivers a dummy packet

insertion command to the dummy packet generator 130. In response, the dummy packet generator 130 generates a dummy packet having a predetermined format and, in synchronism with the readout of a packet from the buffer memory 122, delivers the dummy packet to the output line 2131. The format of the dummy packet is dependent upon the protocol of data transmission. This particular embodiment of Fig. 3 eliminates the need for a demultiplexer because the buffer unit having the address filter 120, the address controller 124 and the dummy packet generator 130 is assigned to each of the output lines 2131 to 213N.

Fig. 4 shows a third embodiment of the present invention using input buffers 1401 to 140N which are individually assigned to the respective input lines 2001 to 200N. The input buffers 1401 to 140N and the buffer units 2501 to 250N which are provided on the output lines 2131 to 213N are interconnected by a bidirectional bus 142. The input buffers 1401 to 140N and bus 142 co-operate as the multiplexer 202 shown in Fig. 3. Each of the input buffers 1401 to 140N temporarily stores a packet coming in over its associated input line in response to a write clock whose frequency is the same as the transmission speed of the incoming packet. The input buffers 1401 to 140N also receive a read clock which cyclically supplied from external clock pulse generator. In response to the read clock, the input buffers 1401 to 140N sequentially deliver the stored packet to the bus 142 on a time division basis so that a multiplexed packet is on the bus 142.

The packet on the bus 142 is fed to all of the buffer unit 2501 to 250N. This is followed by the same procedure as in the embodiment of Fig. 3.

Fig. 5 shows a fourth embodiment of the present invention in which the bus is formed in a loop configuration.

In the embodiment shown in Fig. 4, a bidirectional bus is used for the bus 142 since the direction of the data transmission depends on the position of input buffers along the bus 142. For example, in Fig. 4, the direction of the packet which the input buffer 1401 transmits to the buffer unit 250N is different from the direction of the packet which the input buffer 140N transmits to the buffer unit 2501. The loop configuration allows a unidirectional bus which is economical compared with a bidirectional bus.

In Fig. 5, each of the buffer units 2501 to 250N is assigned to each of the output lines 2131 to 213N similarly with the embodiment shown in Figs. 3 and 4.

A characteristic feature of this particular embodiment is that each of bus control circuits 1541 to 154N for sending data to a unidirectional bus 152 is associated with each of the input lines 2001

to 200N. As shown, each of the bus control circuits 1541 to 154N comprises a first memory 150 for temporarily storing a packet fed over associated one of the input lines 2001 to 200N, a memory 155 for temporarily storing a packet from the unidirectional bus 152, and a selector 153 for routing either one of the packet stored by the first and second memories 150 and 155 to the unidirectional bus 152 in response to a selecting signal which is fed thereto from the outside.

The selector 153 selects data from the first memory 150 and send them to the unidirectional bus 152 when it receives the selecting signal indicative of the data transmission timing of its associated input line, whereas, it feeds data from the second memory 155 with no selecting signal. For example, assuming that the number of the input lines is N and the speed of the operation clock of the selector 153 is U, the selector 153 receives the selecting signal in a $\frac{U}{N}$ period, which has a phase difference of $\frac{1}{N}$ for the selecting signal supplied to the adjacent selector.

By such an operation of the selector 153, packets coming in over the respective input lines are sequentially fed out to the unidirectional bus 152. The unidirectional bus 152 extends across all of the bus control circuits 1541 to 154N, so that packets on the unidirectional bus 152 are routed to all of the buffer units 2501 to 250N. The operation to follow is the same as the operation previously discussed in relation to the second and third embodiments shown in Figs. 3 and 4.

The integrated circuit implementation for the previously discussed packet switch will be considered. Among the four different embodiments shown and described, the embodiments shown in Figs. 3 to 5 individually have common circuits which are provided in one to one correspondence with respect to the input and output lines, compared to the embodiment shown in Fig. 2. Such a configuration, however, is not satisfactory in the integrated circuit aspect for the following reasons. Since the all of the common circuits are connected to the bus, large scale integration of the common circuits results in the need for bus input and output pins the number of which is twice greater than the width of the bus. An increase in the bus width would bring about a pin neck problem. Further, since all the input lines are connected to the bus, assuming that the number of the input lines is N, an operation speed N times higher than the transmission speed of each input line is required. In this respect, too, causing the bus to connect all of LSI's is not desirable. To solve this problem, it is necessary that the bus be confined in the LSI. Considering the fact that the construction shown in Fig. 5 is impracticable for large scale integration since the bus extends across the common circuits, it is realistic

to extend the construction shown in Fig. 3 or 4. While the constructions of Figs. 3 and 4 are not noticeably different from each other with respect to the principle, it will be seen that the Fig. 4 construction has more common portions than the Fig. 3 construction so long as the channel-by-channel circuit arrangement is concerned. The following description will therefore concentrate on the large scale integration of a packet switch which is implemented by the configuration of Fig. 4.

Referring to Fig. 6, a specific construction suitable for the large scale integration of the packet switch shown in Fig. 4 is shown. As shown, a plurality of unit switches each being capable of processing a part of a packet are assigned to the input and the output lines so as to confine a bus into an LSI, which has to operate at a high speed, in an LSI.

Fixed length packets coming in over a plurality (N) of input lines 2001 to 200N are serially applied to serial-to-parallel (S/P) converters 1051 to 105N. Each of the S/P converters 1051 to 105N converts the input packet to parallel data having a predetermined width (assumed to have P bits), while holding a destination address associated with an output line.

The P unit switches #1 to #P, each of which is provided in one-to-one correspondence with respect to the P bits of the parallel data, are connected to the first S/P converters 1051 to 105N. Each unit switch has the same structure and operates in parallel each other. Each unit switch comprises a dummy data generator 112 which generates dummy data, second S/P converters 1081 to 108N each being associated with respective one of the input lines, address filters 1131 to 113N each being associated with respective one of output lines (assumed to be N output lines).

Each unit switch also comprises a data bus 111 which connects the second S/P converters 1081 to 108N to the address filters 1131 to 113N, FiFo memories 1161 to 116N each being associated with respective one of the output lines 2131 to 213N, selectors 1151 to 115N each being associated with respective one of the output lines 2131 to 213N, and first parallel-to-serial (P/S) converters 1171 to 117N each being associated with respective one of the output lines.

On the other hand the FiFo memories 1161 to 116N each comprises a read and a write address pointers, a address comparator and a memory means like the buffer unit shown in Fig. 3. In response to a read clock from outside, the address comparator compares the pointers and determines whether the memory is empty or not. If the memory is empty, the comparator produces an empty signal while the data are read out by the address indicated by the read address pointer if the mem-

ory has data.

The selectors 1151 to 115N each selects either data from the associated FiFo memory or dummy data from the dummy data generator 112 in response to the nature of a selecting signal. For such a FiFo memory, for example, a FiFo memory "CY7C420" described in CMOS DATA book (Reference 2) by Cypress Semiconductor Corporation, can be used. The outputs of the P unit switches #1 to #P are fed to their associated second P/S converters 1191 to 119N on an output line basis and are thereby transformed into serial data of output line speed.

The operation of the packet switch having the above construction will be described in more detail with reference to Figs. 7a to 7c. Assume that the transmission speed of the input lines 2001 to 200N is V bit/s, the packet length is 64 bits, and eight unit switches are provided. Further, assume that all the S/P converter convert a serial input to an 8-bit output while all the P/S converters convert an 8-bit input to a serial output. By way of example, assume that a packet from the input line 2001 is coupled to the output line 2131. The explanation is directed to the operations of the unit switch #1 for simplification. Further, the selector 1151 and the dummy data generator 112 are ignored since they have no effect on the data in this particular case.

A packet having a format shown in Fig. 7a, i.e., an address field from the 1st to 8th bits and data area from the 9th to 64th arrives at the first S/P converter 1051 over the input line 2001. The S/P converter 1051 converts the packet to eight blocks DATA1 to DATA7 and ADRS each having an 8-bit width, as shown in Fig. 7b. In Figs. 7a - 7c, respective numbers 1 to 64 attached to each bit indicate the position of the bit in the packet. Having an address latching function, the first S/P converter 1051 latches only the address field of the entered packet. The S/P converter 1051 delivers the first bit of the respective data blocks to the unit switch #1. The first S/P converter 1051 also delivers the second bit of the respective data blocks to the unit switch #2. The second S/P converter 1081 converts the 8 first bits from the first S/P converter 1051 to 8-bit parallel data and adds to the parallel data the address field being latched by the first S/P converter 1051. More specifically, the S/P converter 1081 converts the leading bits (bits 1, 9, 17, ..., 49, 57) of the eight individual data blocks to parallel data and then adds the address data to the parallel data as shown in Fig. 7b. By the second S/P converter 1081, the operation speed of the bus 111 is reduced to 1/8, compared to a case without the S/P conversion of data blocks. Due to the S/P conversion by the S/P converters 1051 and 1081, data whose speed is one-sixty-fourth ($= 1/8^2$) of V bit/s appear on the outputs of the N second S/P

converters 1081 to 108N of the unit switches. The S/P converters 1081 to 108N feed the parallel 16-bit data including the address field to the bus 111 in response to read clock pulses that are sequentially fed from the outside. These read clock pulses have a bit rate of $V/64 \times N$, and each is different in phase by $V/64$ from the nearby read clock pulses. As a result, a time-divided signal appears on the bus 111.

The address filters 1131 to 113N are provided on the individual output lines 2131 to 213N. The data appearing on the bus 111 are applied to all of the address filters 1131 to 113N. When any of the address filters 1131 to 113N determines that the address is meant for it by referencing the address field of the input data, it writes eight bits of data which follow the address in the associated one of the FiFo's 1161 to 116N by supplying a write enable signal with the data (Fig. 7c). The data written in the FiFo's 1161 to 116N are read out at the same time on all of the channels in response to a read clock which has a bit rate of $VN/64$ and is fed from a clock pulse source, not shown. As shown in Fig. 7c, the 8-bit data read out of any of the FiFo's 1161 to 116N are converted to $V/8$ bit/s serial data by the associated first P/S converter and then fed out of the unit switches #1 to #8. Eight sequences of serial data in total from the respective unit switches, which forms parallel data, are transformed into V bit/s serial data by the second P/S converter 1191 and then applied to the output line 2131.

On the other hand, when the read clock pulse is supplied to the one of the FiFo memories 1161 to 116N, which has no data to be read out, the FiFo memory supplies an empty indicating signal as a selecting signal to the associated selector. In response, the selector selects the dummy data from the dummy data generator 112, which form the dummy packet when it is outputted from the associated output line through the associated first and second P/S converters. For example, the dummy data generator 112 delivers the unit switch #1 the eight bits (1st, 9th, 17th, ..., 49th, 57th) of the dummy packet, and similarly delivers the unit switch #8 the eight bits (8th, 16th, 24th, ..., 56th, 64th) of the dummy packet.

By using a plurality of unit switches which operate in parallel as discussed above, it is possible to confine a bus within the unit switch and therefore to promote large scale integration. The number of unit switches is readily variable to implement any desired switch scale.

In Fig. 6, each unit switch is provided with address filters 1131 to 113N in association with the output lines. However, considering the fact that each unit switch processes part of a packet which is assigned thereto, if the j -th ($1 \leq j \leq N$) address

filter 113j of a certain unit switch writes data in the FiFo 116j, all the other filters 116j of other unit switches will perform the same operation as the unit switch at the same time. Hence, the sharing of one address filter with the associated FiFo memories of unit switches permits the reduction of address filters noticeably.

Fig. 8 shows a specific construction for implementing such an alternative scheme.

In Fig. 8, all the address filters of the unit switches are omitted and, instead, a centralized address controller 238 is provided. Each parallel address field of a packet latched by each of the S/P converters 1051 to 105N is fed to the address controller 238 in the form of serial data. The address controller 238 comprises S/P converters 2281 to 228N individually associated with the input lines and an address bus 231 which interconnect the address filters 2321 to 232N.

The address filters 2321 to 232N are associated with respective one of groups of the FiFo memories which are associated with the same output line in each unit switch. For example, the address filter 2321 is associated with the FiFo memories 2171 in the unit switches #1 to #N. Address fields are converted by the S/P converters 2281 to 228N to parallel data and are latched until read out. On the other hand, the S/P converters 1091 to 109N in the unit switch convert input bits to parallel data.

While the construction of Fig. 6 is incapable of making effective use of the bus because address fields are added to the converted parallel data in the S/P converters 1091 to 109N, the alternative construction shown in Fig. 8 assigns an exclusive bus 215 to data and therefore promotes high-speed processing.

A read clock pulse is sequentially fed from the outside to the S/P converters 1091 to 109N and 2281 to 228N on a channel-by-channel basis. In the address controller 238, the address filters 2321 to 232N individually take in the address fields which are produced on the address bus 231. If any of the address filters 2321 to 232N determines that the input address is meant for it, it feeds a write enable signal to FiFo's which constitute the associated FiFo group of the unit switches. In each unit switch, the S/P converters 1091 to 109N deliver data to the data bus 215 in response to the read clock pulse and, hence, the FiFo's 2171 to 217N write-enabled take in data from the data bus 215. The operations of the dummy data generator 112, selectors 1151 to 115N and P/S converters 1171 to 117N and the manners of outputting from each unit switch are the same as in the construction of Fig. 6.

The centralized address control discussed above is successful in eliminating the need for address filters of unit switches and in facilitating

the synchronization among unit switches.

As shown in Fig. 9, the buffer memories may be implemented by random access memories (RAM's) in place of the FiFo's shown in Fig. 8. A FiFo may be regarded as being fabricated by adding a write and a read address pointers to a RAM as described in Reference 2. On the other hand, each unit switch performs bit-slice processing so that the FiFo's assigned to the same channel write and read data out of the same address throughout the unit switches. To further simplify the unit switch configuration, therefore, the read and write address pointers may be collectively built in the address controller 238 of Fig. 8.

In Fig. 9, RAM controllers 3541 to 354N and the address filters 2321 to 232N are provided in an address controller 343 and assigned to the individual output lines.

Each of the RAM controllers has a similar structure to the address controller 124 shown in Fig. 3. When the RAM controller 3541, for example, receives a write enable signal from an address filter 2321, it delivers to its associated RAM 3171 the value of a write address pointer as a write address and a write enable signal and then increments the value of the write address pointer. In response to the write enable signal and the write address, data on the data bus 215 are written in the RAM 3171. More specifically, in response to a read clock pulse fed from a read clock source, not shown, the RAM controller 3451, for example, compares the values of its the read and the write address pointers. If the values are different from each other, the RAM controller 3451 delivers the value of the read address pointer as a read address and a read enable signal to the RAM and then increments the read address pointer. In response to the read address and the read enable signal, the data at the read address are read out from each RAM of each unit switch. Meanwhile, when the read and the write addresses are the same, the RAM controller supplies a selecting signal to the associated selector and the read enable signal to the associated RAM. The operations of the selectors 1151 to 115N, P/S converters 1171 to 117N, dummy data generator 112 and second P/S converters 1191 to 119N are in the same manners as the packet switch of Fig. 8.

Referring to Fig. 10, a specific implementation for eliminating the neck of the number of gates in an LSI configuration is shown. Specifically, when the packet switch shown in any of Figs. 6, 8 and 9 is fabricated in an LSI configuration, the number of input and output lines available is dependent upon the number of gates which may be integrated in a single LSI. On the other hand, in the above construction, a majority of the LSI gates is assigned to the address filters and FiFo's of the output side so

that an increase in the number of output lines would make it difficult to confine the bus in an LSI. In the light of this, the construction shown in Fig. 10 distributes the circuits associated with those output lines which consume a relatively large number of gates. This allows the number of output lines to be increased while accommodating the bus in an LSI.

In Fig. 10, a packet switch having four input lines and four output lines is shown by way of example. More specifically, a 4-input lines and 4-output lines packet switch is constituted by dividing output lines, i.e., by two packet switches each having four input lines and two output lines. While the unit switches, the S/P converters and the P/S converters shown in Fig. 10 individually operate in the same manner as the packet switch of Fig. 6, it will be apparent that the configuration of Fig. 10 is applicable to any of the embodiments shown in Figs. 8 and 9.

Various modifications will become possible for those skilled in the art after receiving the teachings of the present disclosure without departing from the scope thereof.

Claims

1. A packet switch for exchanging packets received over a plurality of input lines and outputting exchanged packets, to a plurality of output lines, comprising:
 - multiplexing means for time-division multiplexing the packets received over said plurality of input lines to multiplexed packets;
 - address detecting means for detecting an address of each packet in the multiplexed packets to produce a destination address;
 - write address generating means responsive to the destination address for generating write address;
 - read address generating means for sequentially generating read addresses;
 - memory means constituted by a plurality of memory areas individually associated with said plurality of output lines, said memory means responsive to said write address for storing each packet of the multiplexed packets in any of said memory areas, and responsive to said read addresses for producing exchanged multiplexed packets by reading the stored packets; and
 - demultiplexing means for demultiplexing said exchanged multiplexed packets into said exchanged packets and delivering them to said plurality of output lines.

2. A packet switch having a plurality of input lines and a plurality of output lines and exchanging packets received over said input lines and delivering exchanged packets to said output lines,

comprising:

packet generating means for generating multiplexed packets based on packets received over said plurality of input lines;

a plurality of control means each being associated with respective one of said plurality of output lines for temporarily storing only necessary one of the multiplexed packets and then delivering said necessary packet as said exchanged packet to associated one of said output lines, and

distributing means for distributing the multiplexed packets from said packet generating means to all of said plurality of control means.

3. A packet switch as claimed in claim 2, wherein each of said plurality of control means comprises:

address detecting means for detecting a destination address for its own control means to produce a detected signal;

write address generator means responsive to said detected signal for generating a write address;

read address generator means for generating a read address;

memory means responsive to the detected signal and the write address for storing said necessary one of the multiplexed packets and delivering the stored packet to the associated output line in response to the read address.

4. A packet switch as claimed in claim 2 or 3, wherein said packet generating means and said distributing means comprises:

a plurality of memory means each associated with said input lines for temporarily storing the packet from said input lines and sequentially producing the stored packets in response to a read clock pulse supplied from outside, and

bus means responsive to said stored packets for providing said multiplexed packets thereon.

5. A packet switch having a plurality of input lines and a plurality of output lines, exchanging packets received over said input lines and delivering exchanged packets to said output lines, comprising:

a plurality of first serial-to-parallel converting means each being associated with respective one of said input lines for converting the packet coming in over associated one of said input lines to first parallel data having a predetermined number of bits, while latching address information contained in said packet;

packet exchange means having memory means each being associated with respective one of said output lines for receiving the first parallel data and the associated address information outputted by said plurality of first serial-to-parallel converting means and, by referencing each of said plurality of address information, for writing said associated parallel data in associated ones of said memory

means; and

a plurality of first parallel-to-serial converts each being associated with respective one of said plurality of output lines for reading the first parallel data out of associated one of said memory means of said control means, converting said first parallel data to first serial data, and delivering said first serial data as exchanged packet to associated one of said output lines.

6. A packet switch as claimed in claim 5, wherein said packet exchange means comprises a plurality of unit packet exchange means each being associated with respective one of bits of the first parallel data,

said unit packet exchange means each comprising: a plurality of second serial-to-parallel converting means each being associated with said plurality of first serial-to-parallel converting means for receiving the associated bits of the first parallel data as input serial data, converting said input serial data into second parallel data having a second predetermined number of bits, combining the address information being latched by said associated serial-to-parallel converting means with said second parallel data to produce third parallel data;

a plurality of address filter means each being associated with said plurality of output lines for determining whether or not the third parallel data is meant for said associated output line by referencing the address information of the third parallel data and, if a result of decision is positive, outputting the second parallel data by removing said address information from said third parallel data;

a bus means for distributing the third parallel data from one of the second serial-to-parallel converting means to all of the address filter means;

memory means each being associated with said address filter means for holding as write data the second parallel data which is outputted by associated one of said address filter means and outputting said held second parallel data at a predetermined period; and

second parallel-to-serial converting means each being associated with said memory means for converting the second parallel data outputted by associated one of said memory means to second serial data and outputting said second serial data.

Fig. 1
PRIOR ART

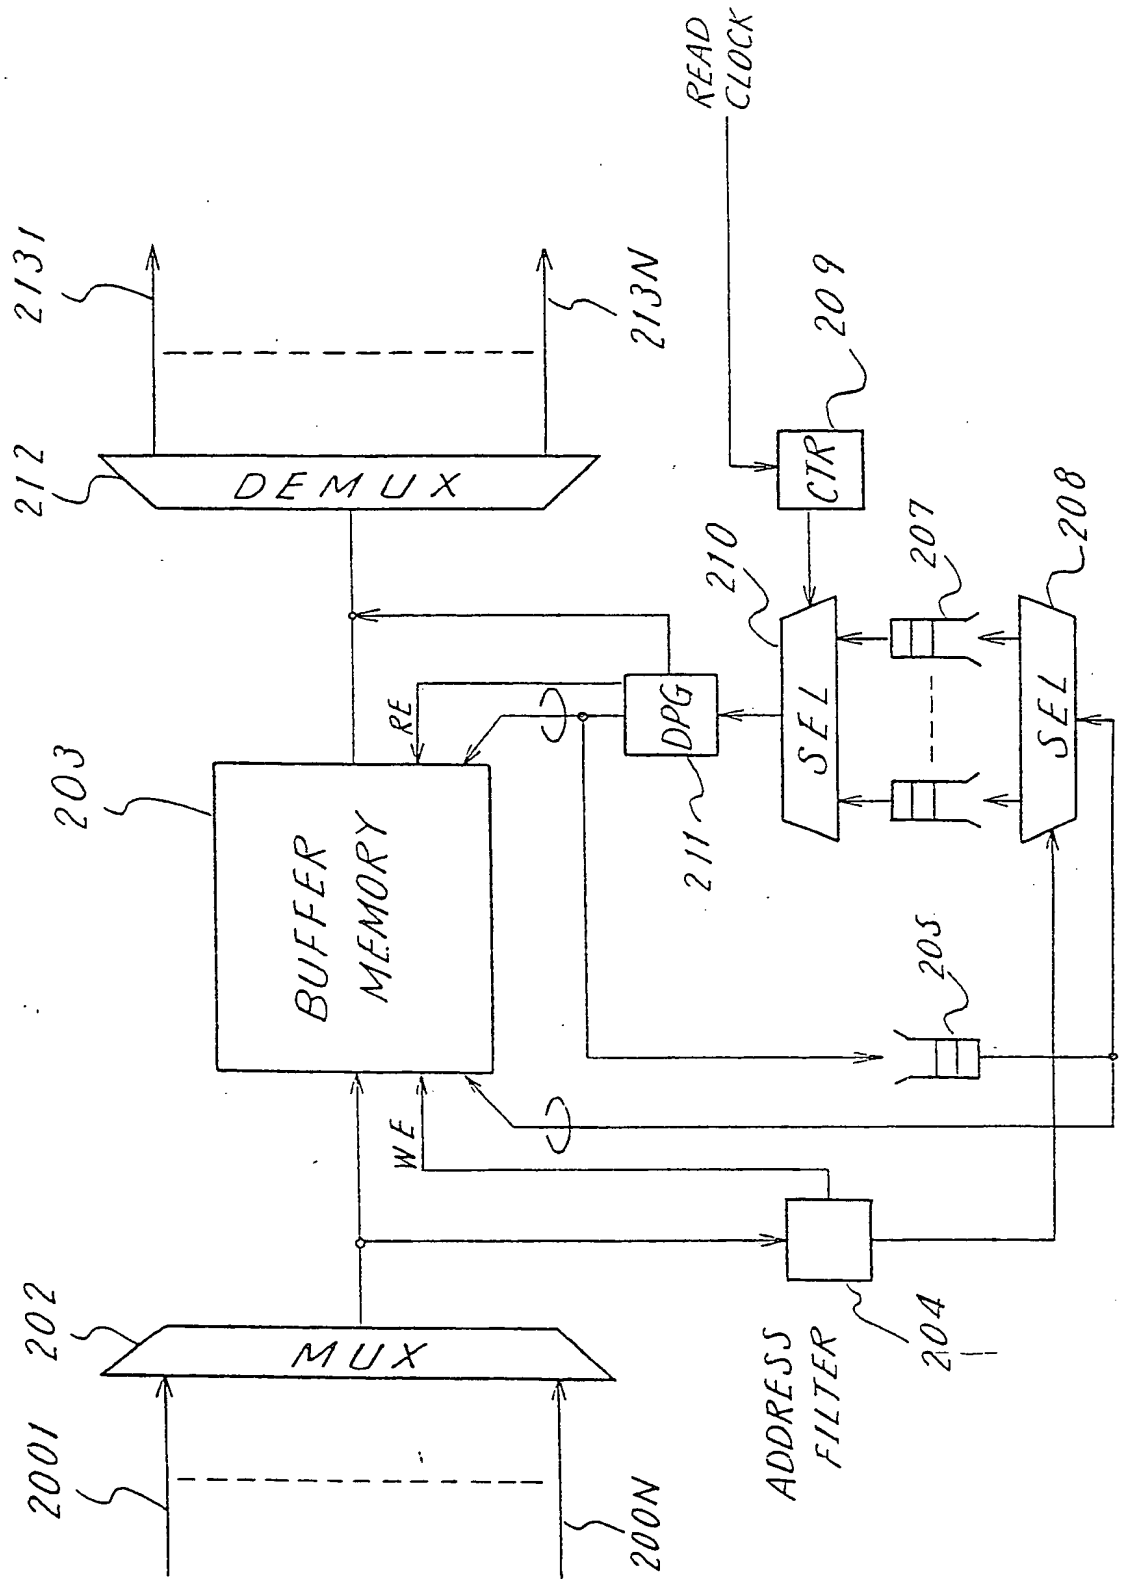


Fig. 2

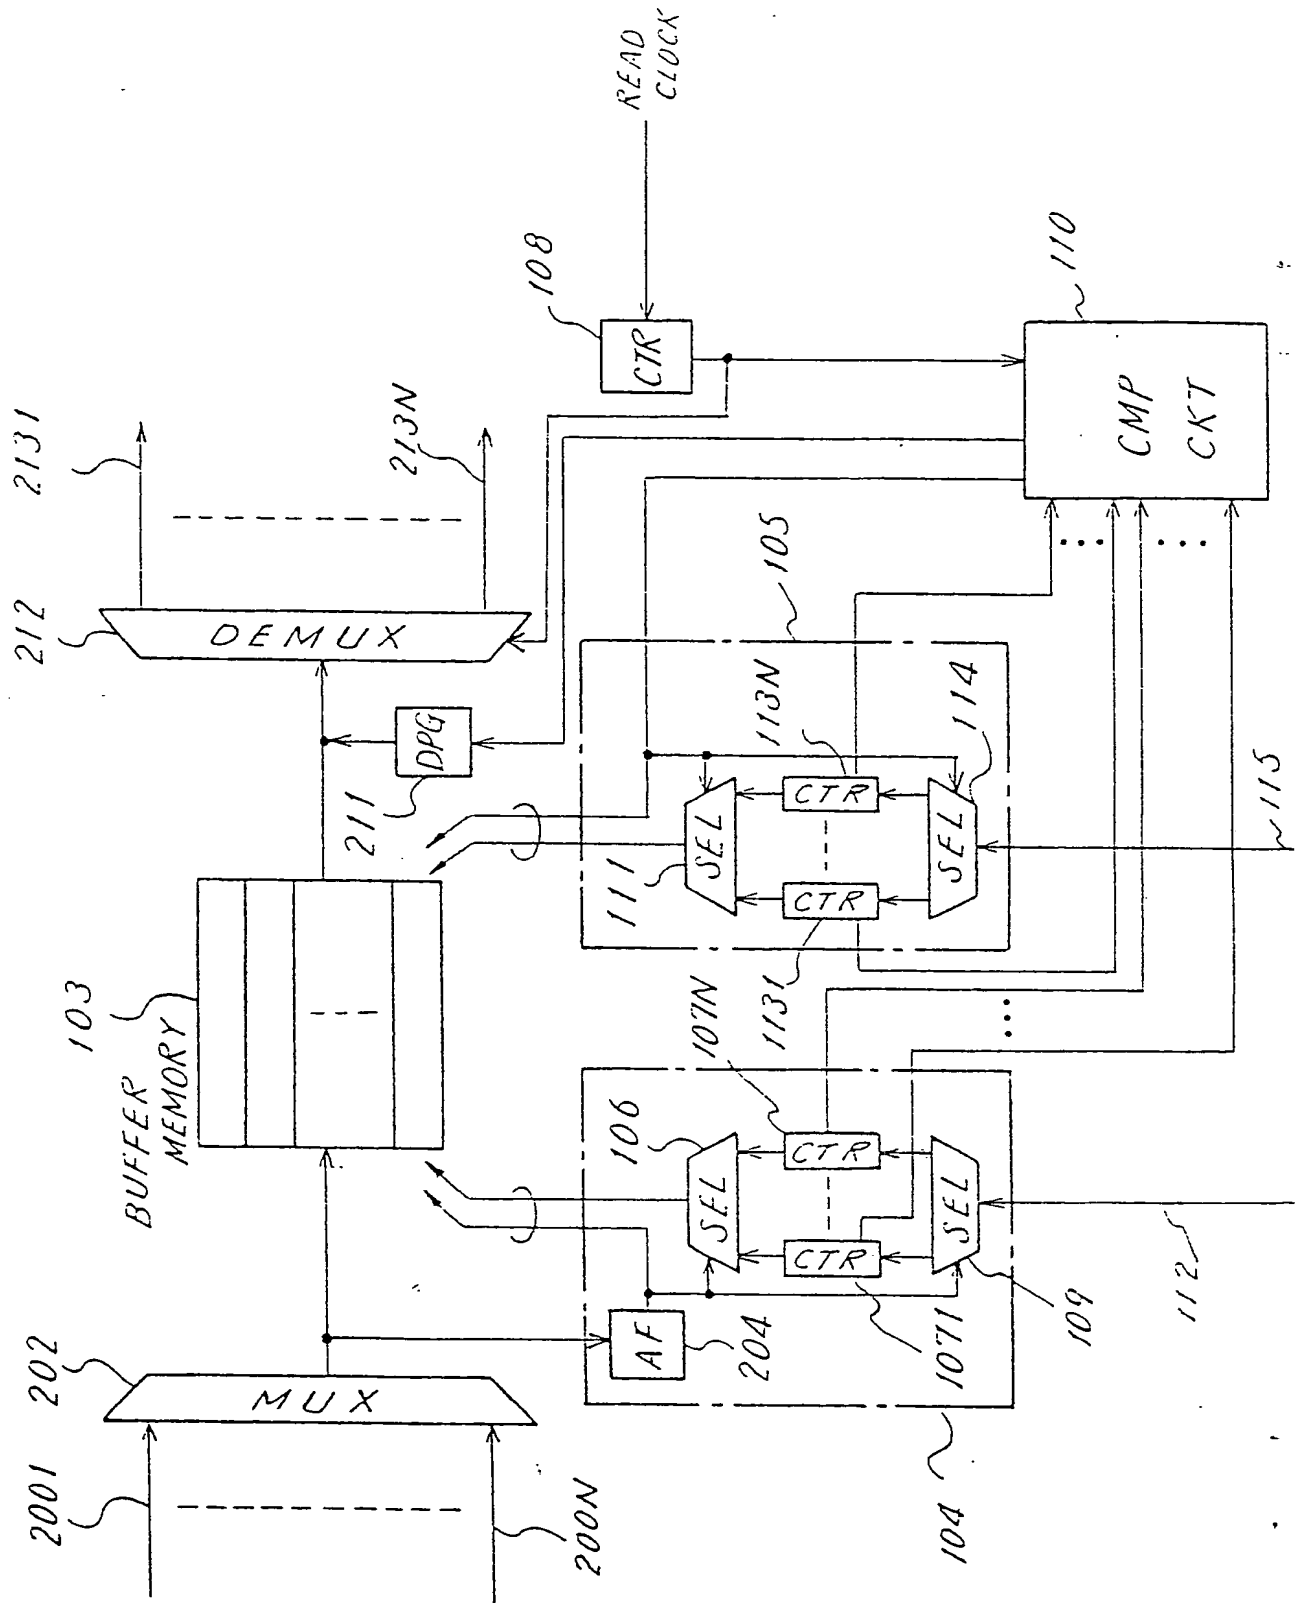


Fig. 3

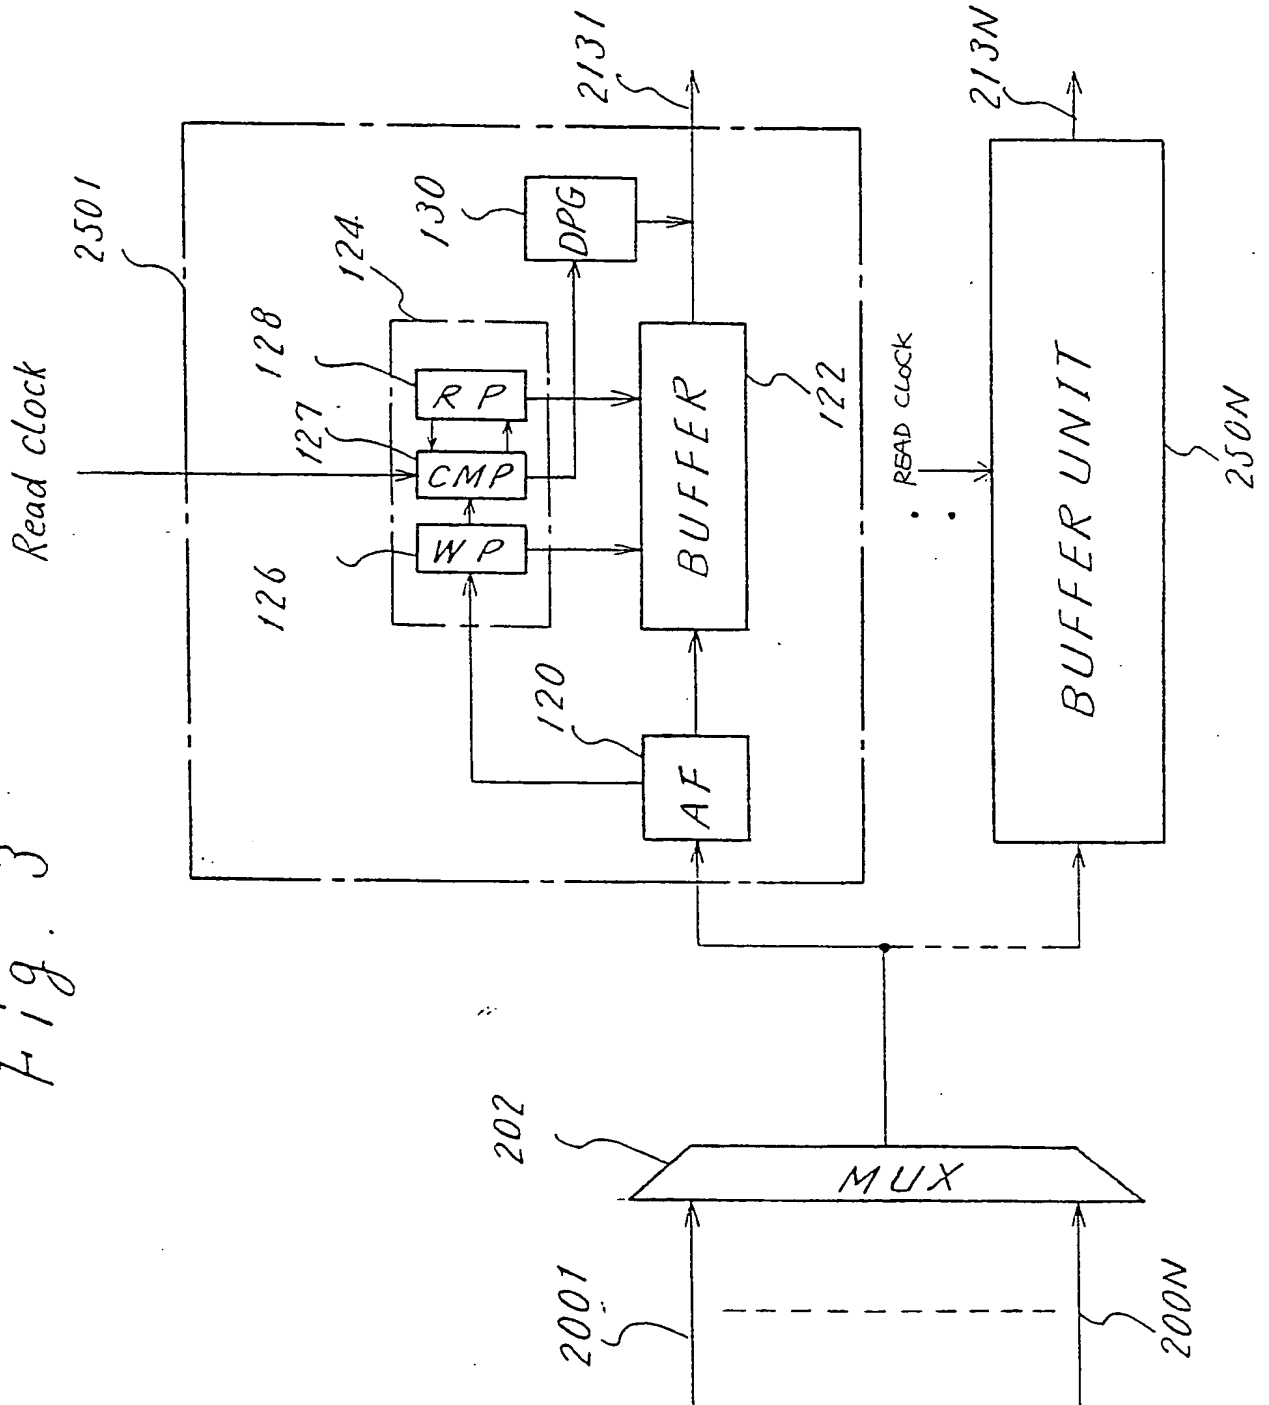


Fig. 4



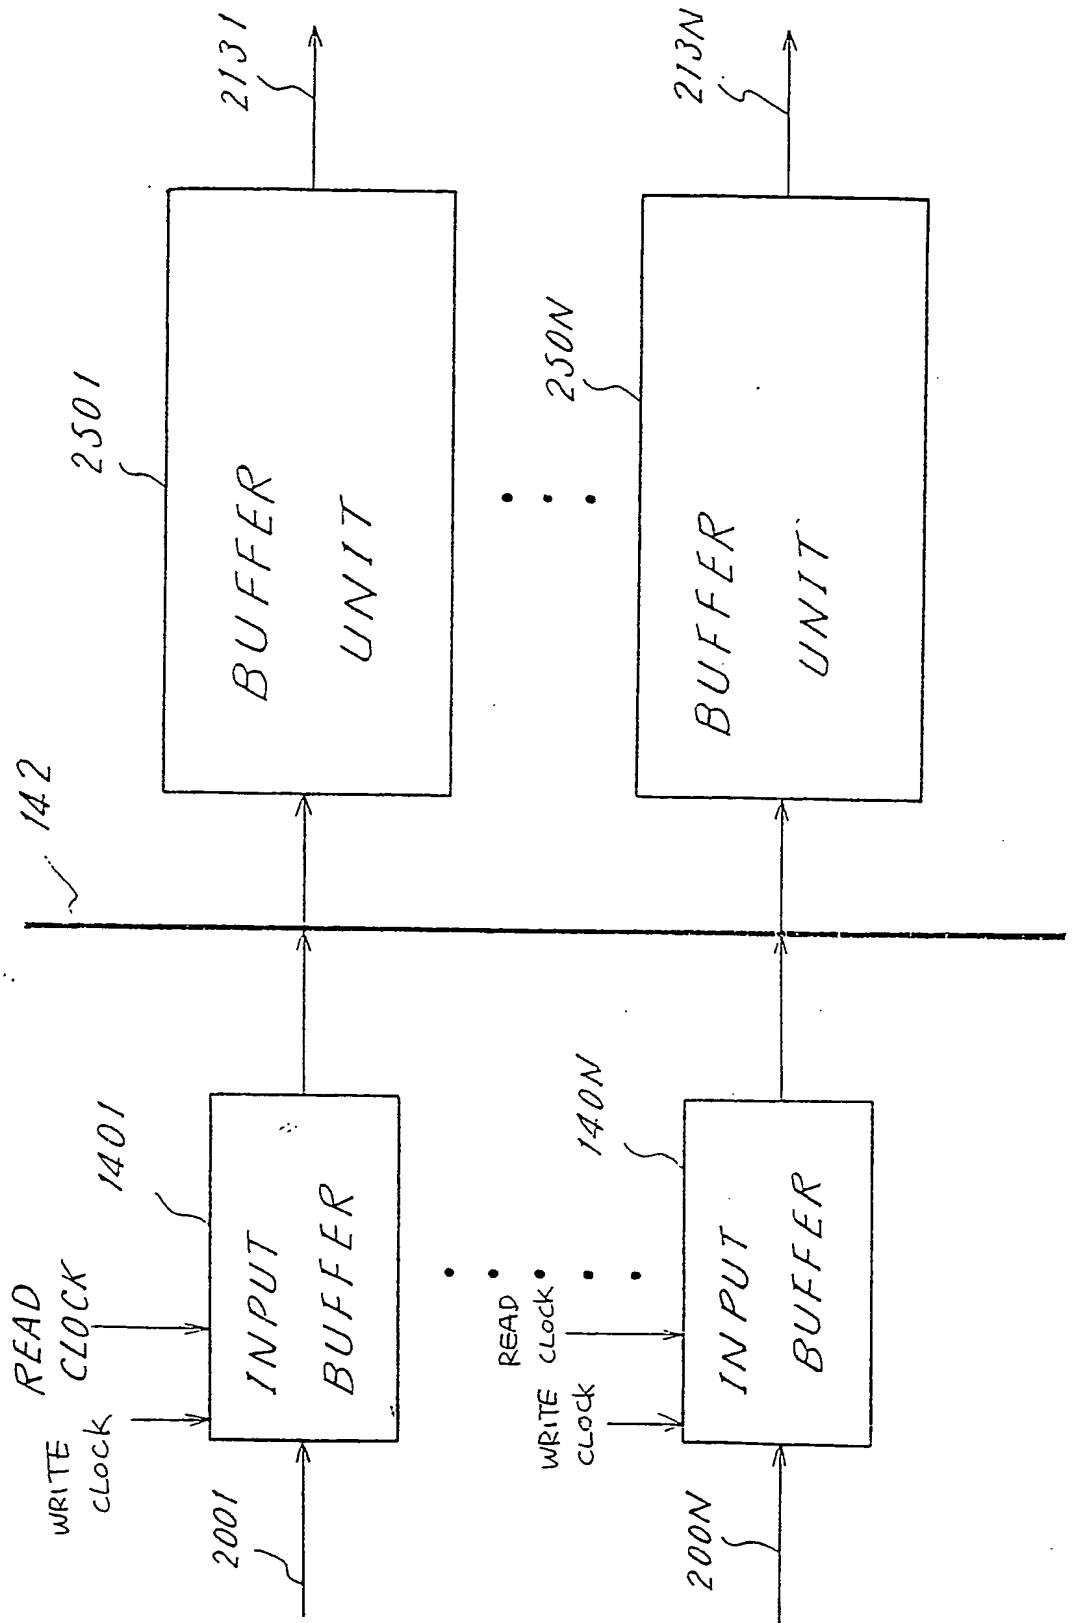


Fig. 5

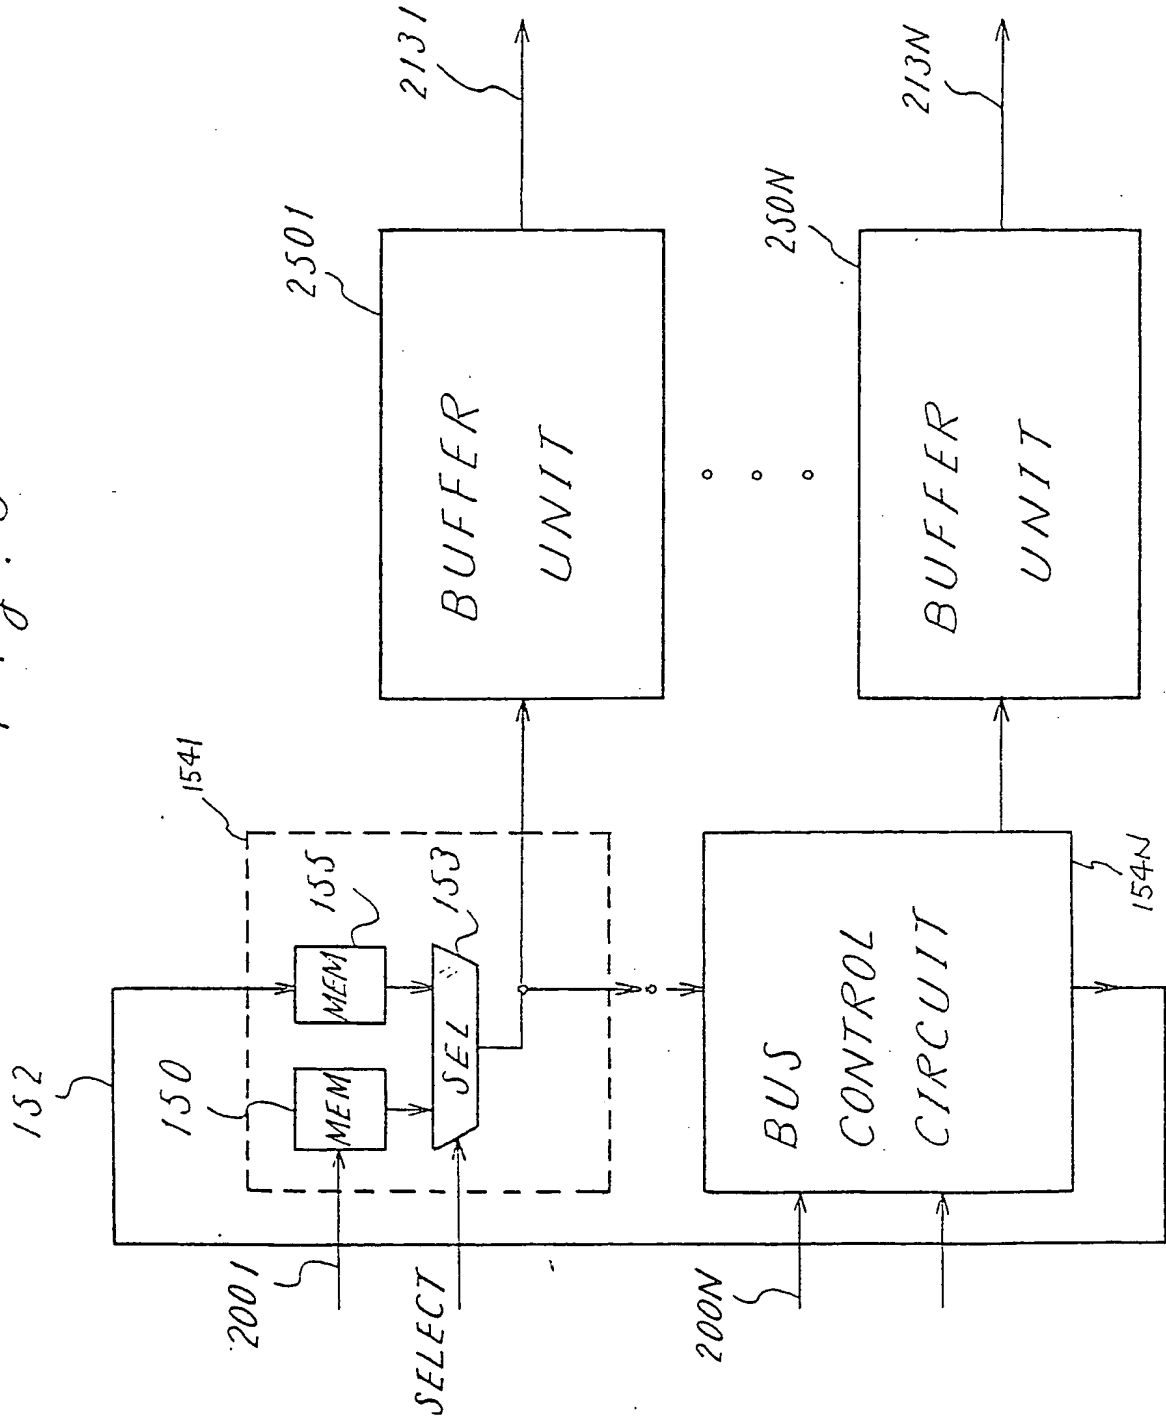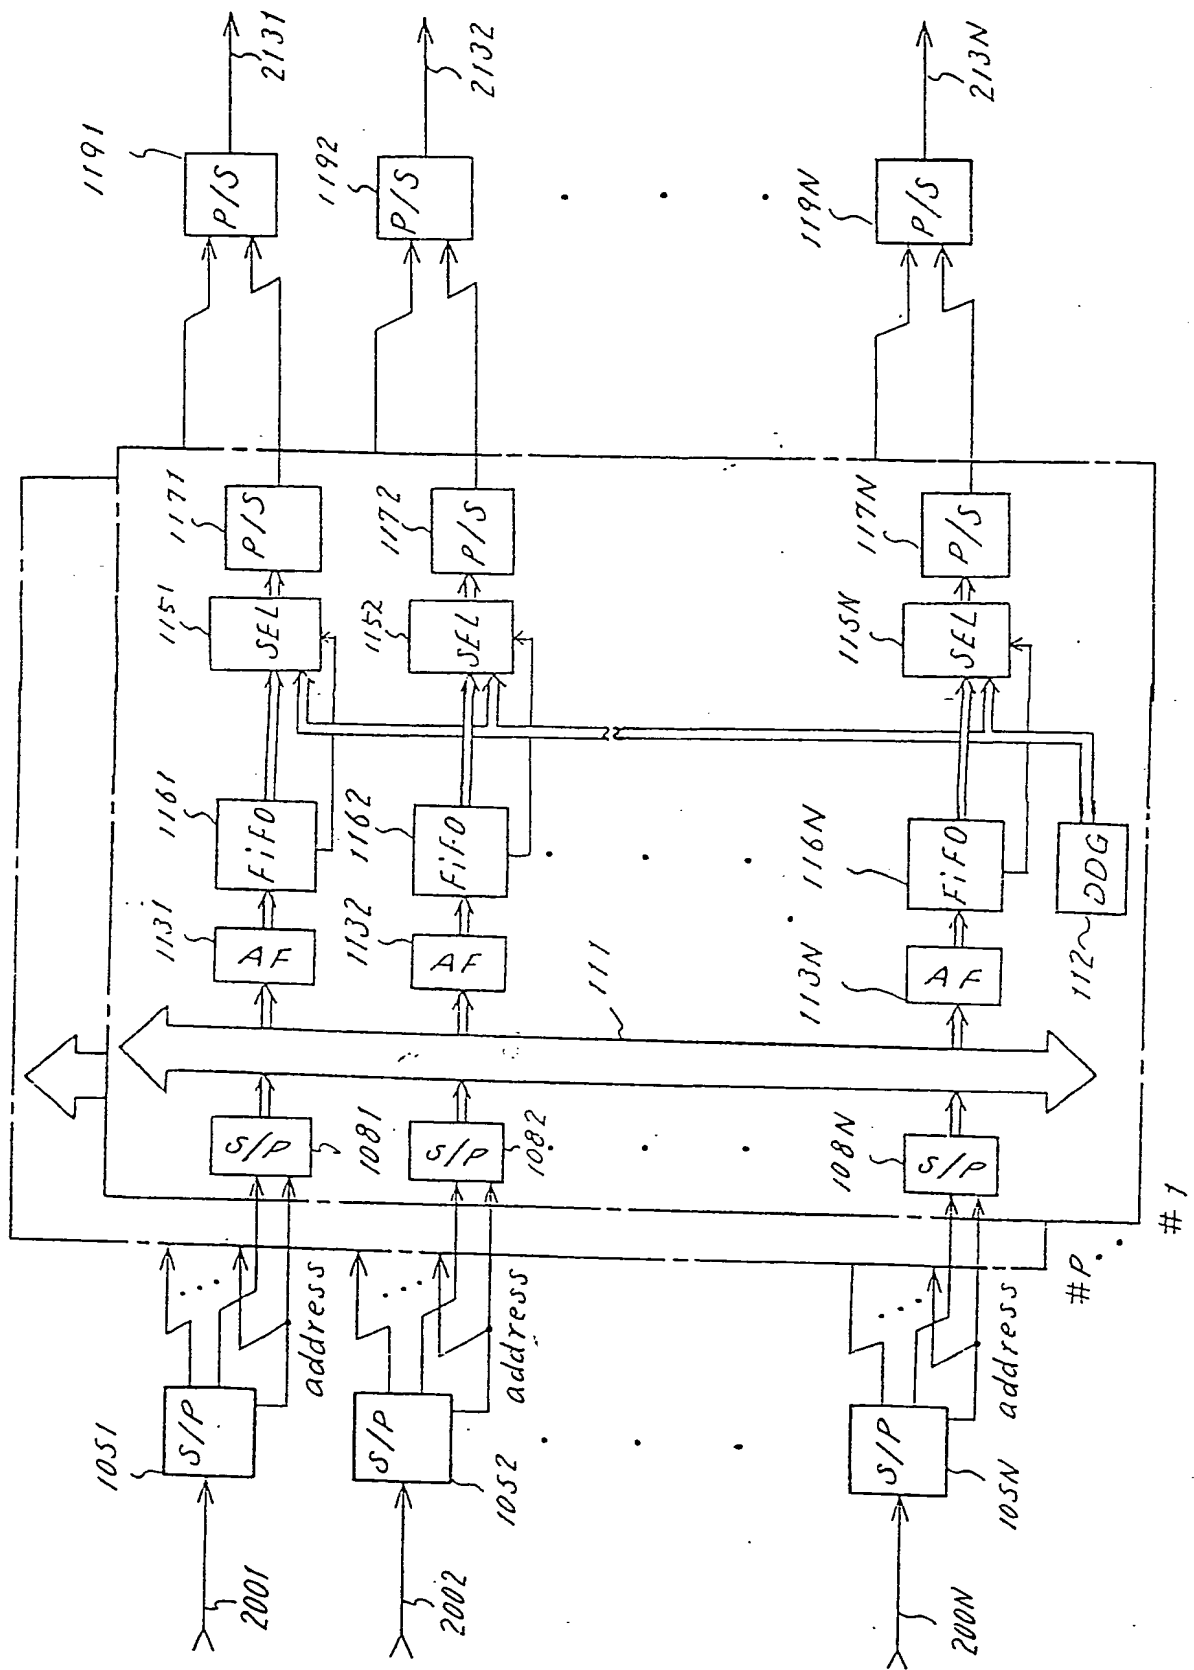

9. B. 7.



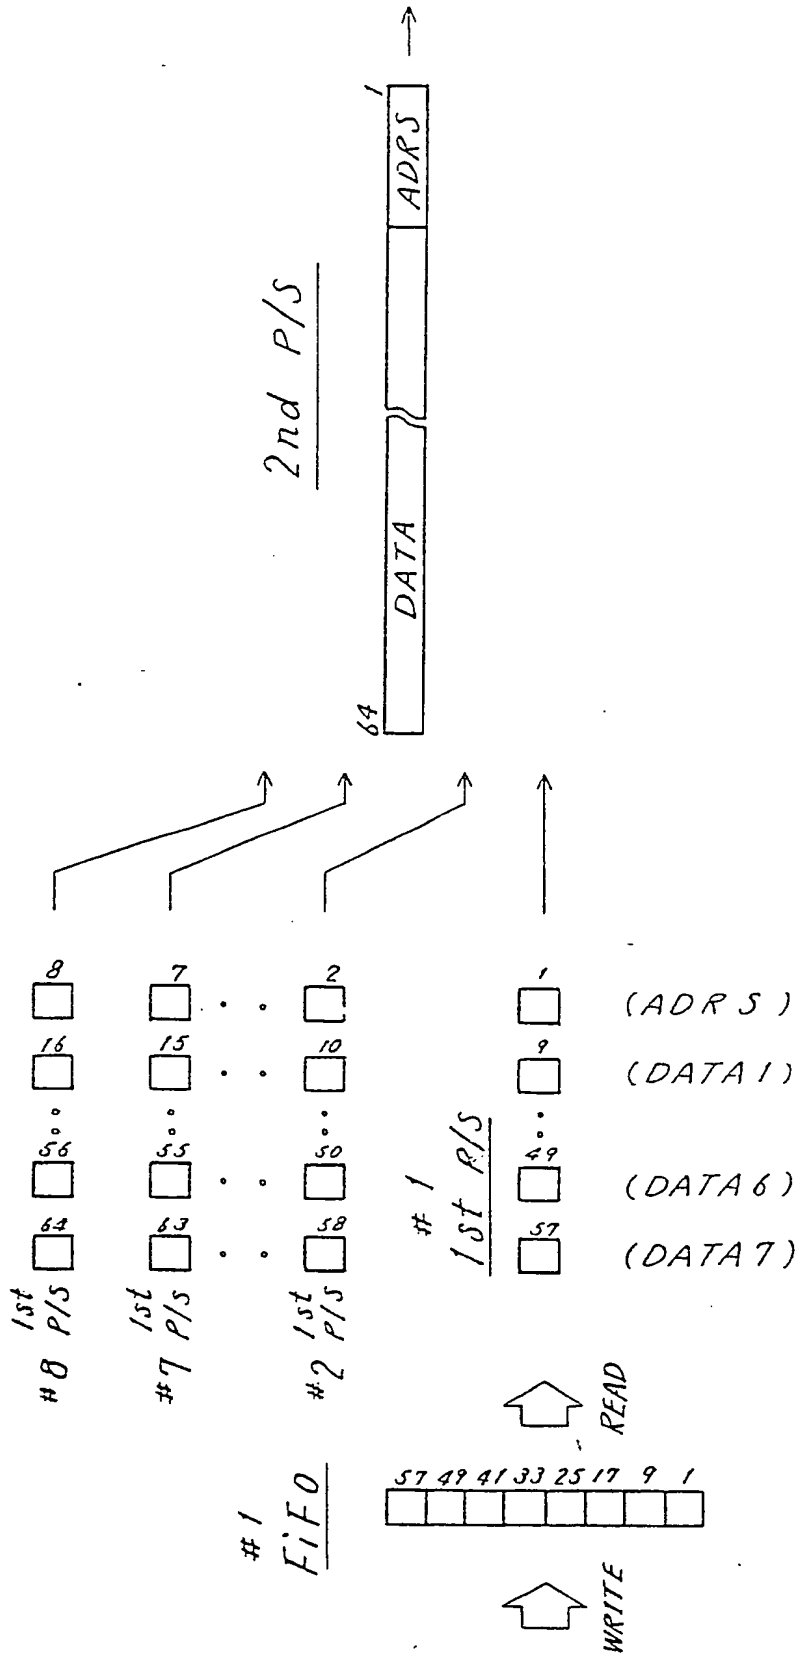


Fig 7c

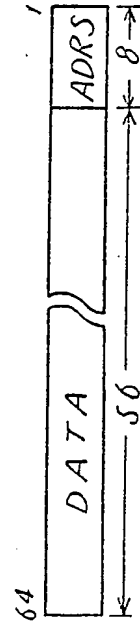


Fig 7a

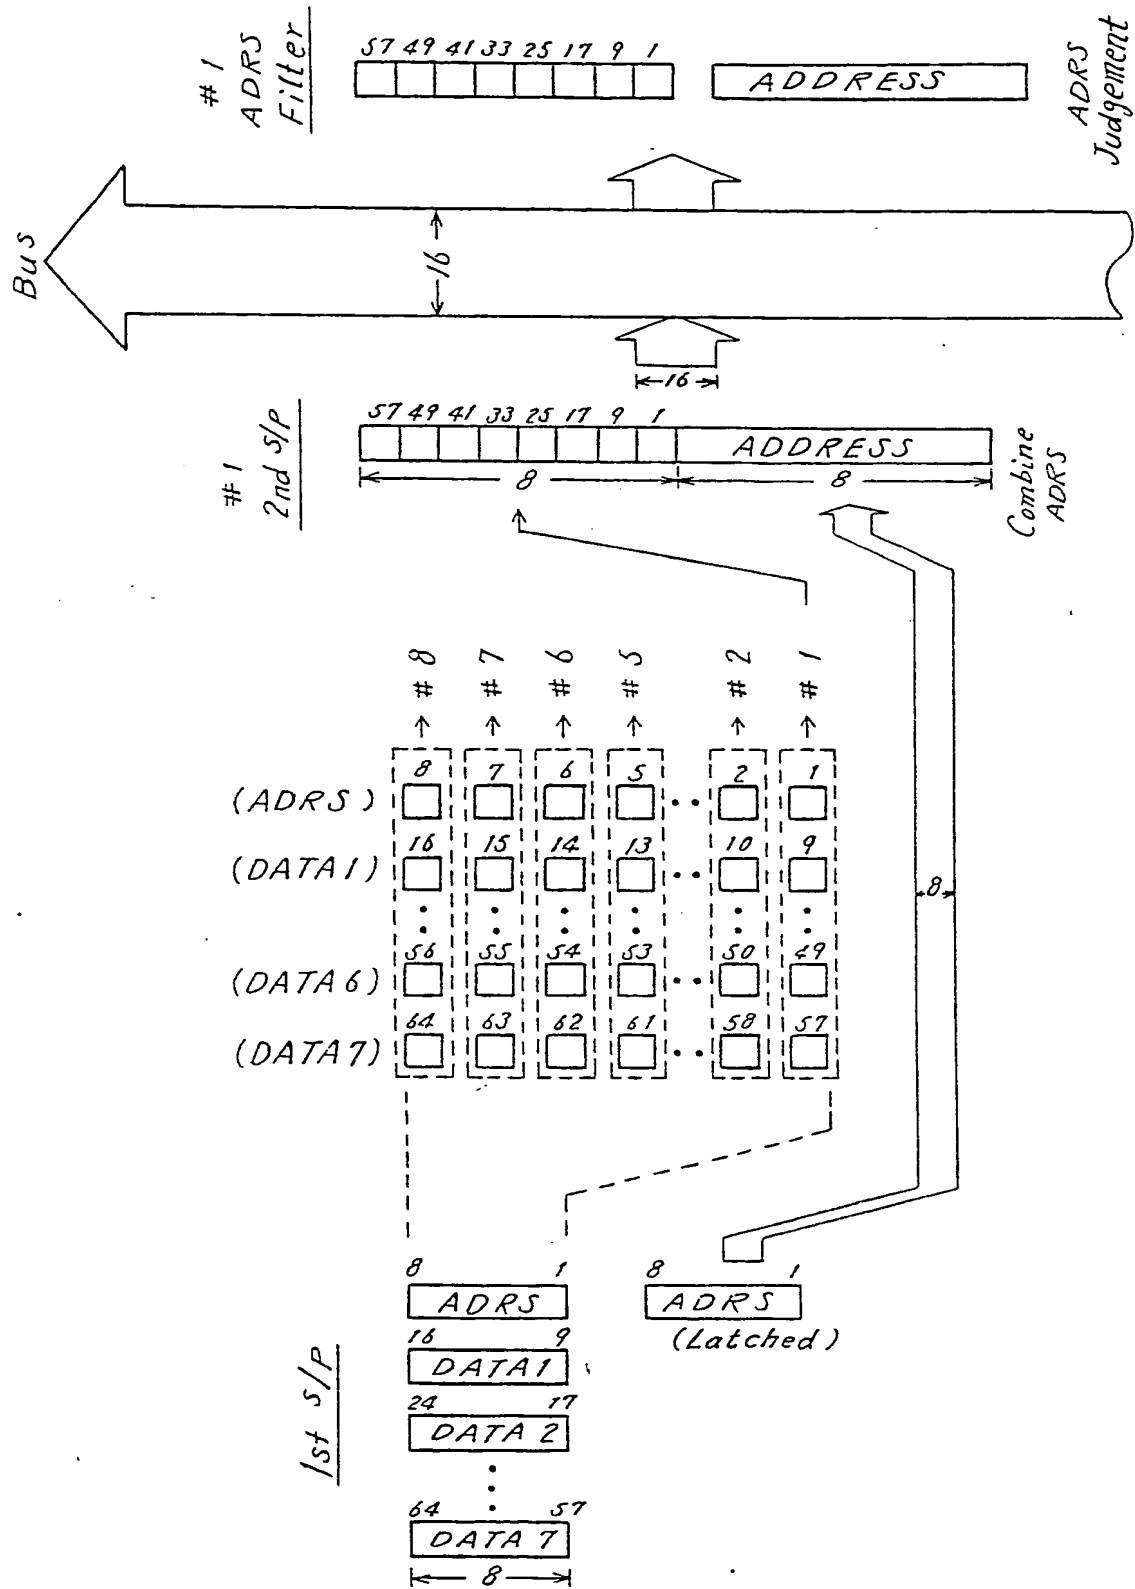


Fig 7b

Fig. 8

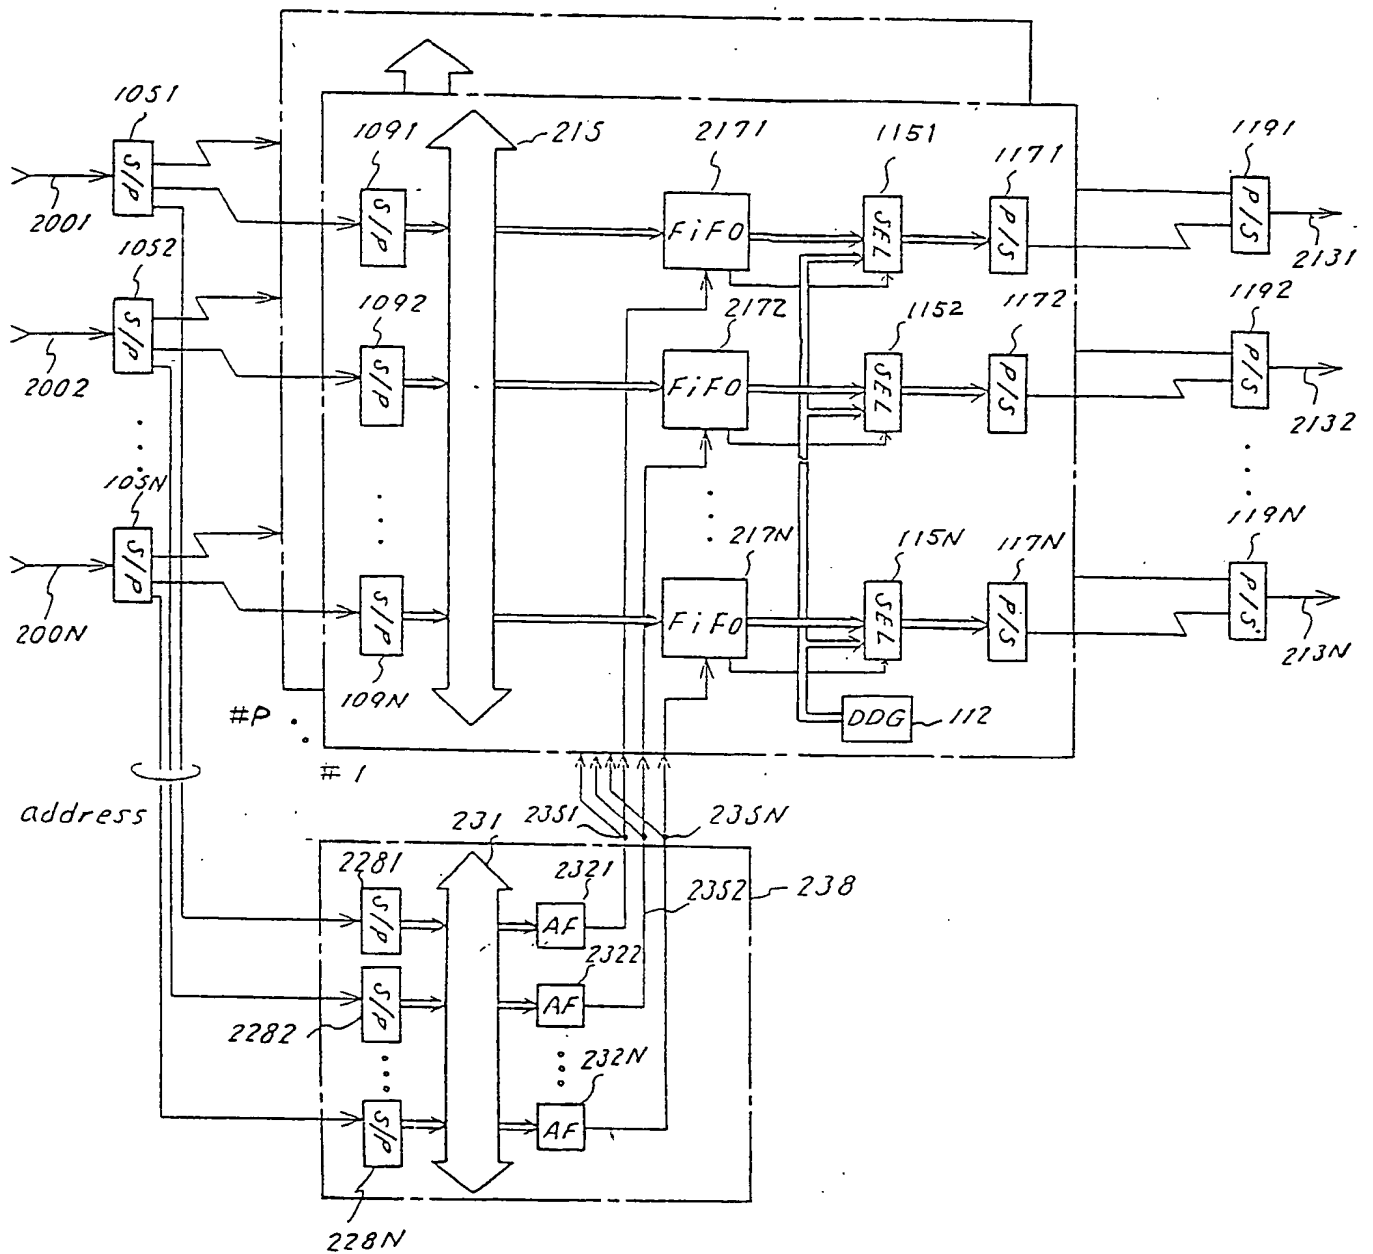


Fig. 9


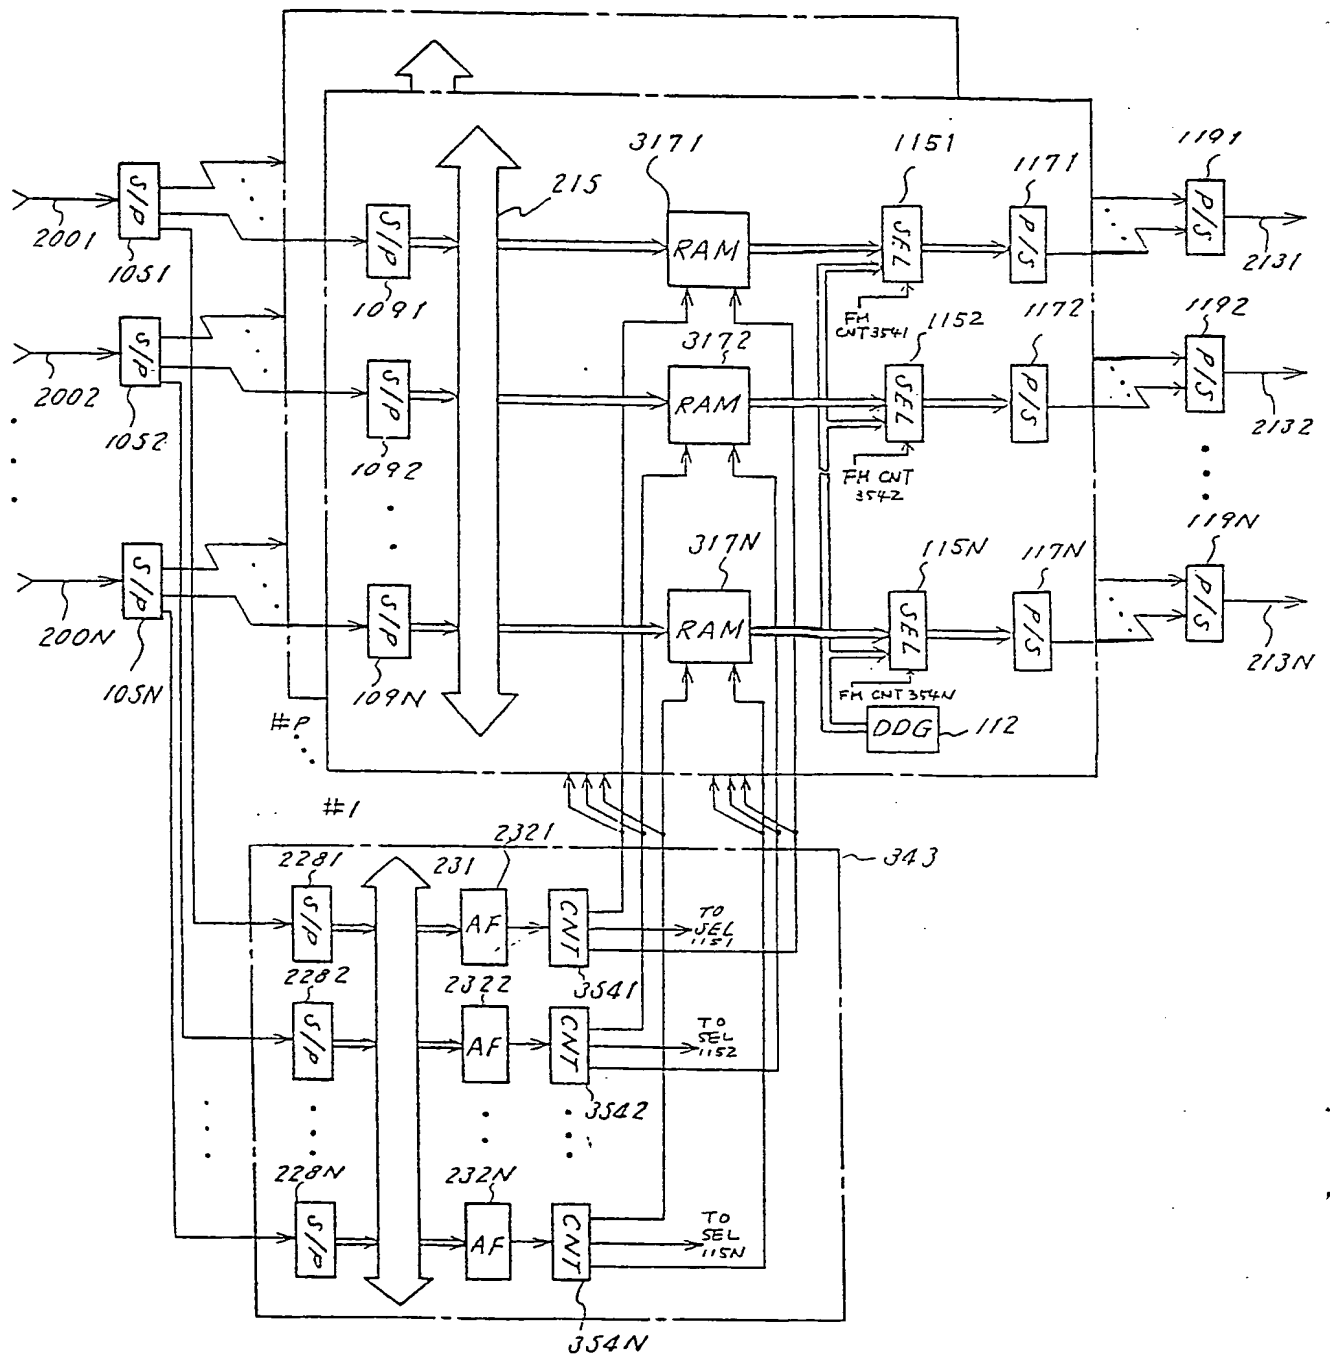


Fig. 10





Europäisches Patentamt
European Patent Office
Office européen des brevets

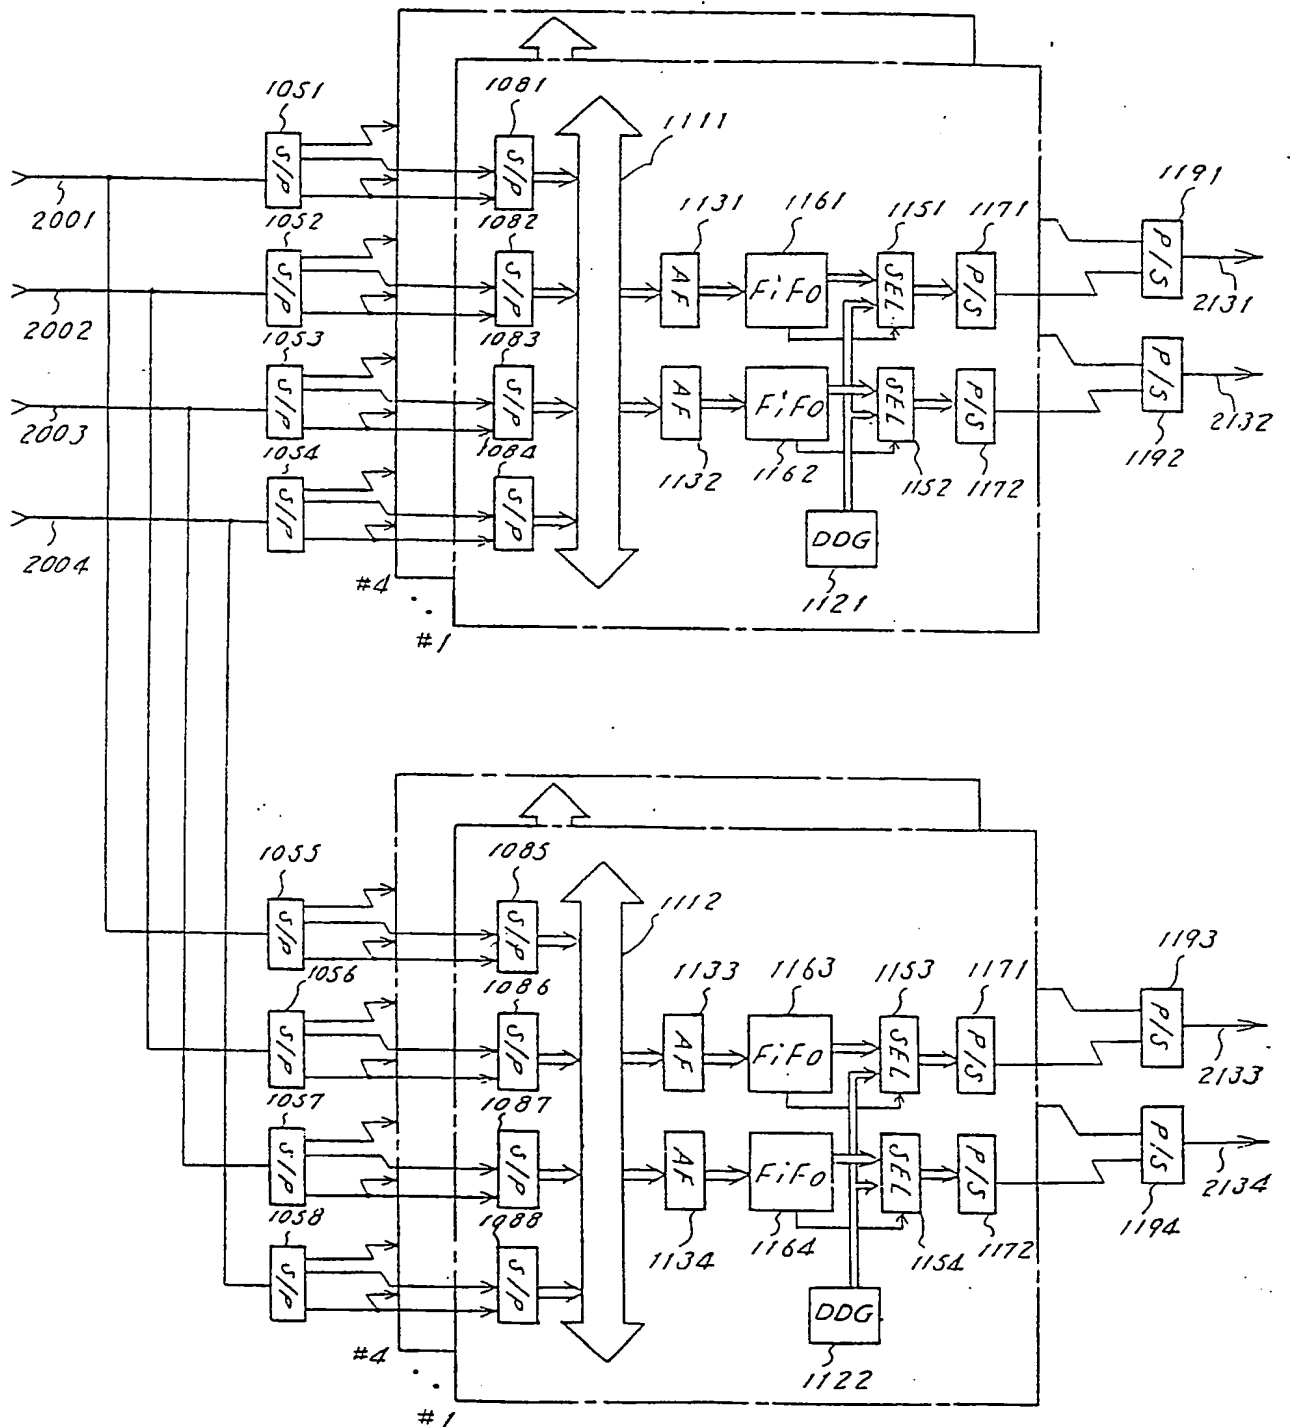

(11) Publication number:

0 338 558 A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: **89107134.2**

(51) Int. Cl.⁵: **H04L 11/20**

(22) Date of filing: **20.04.89**

(30) Priority: **21.04.88 JP 99938/88**
31.08.88 JP 219364/88

(43) Date of publication of application:
25.10.89 Bulletin 89/43

(84) Designated Contracting States:
DE FR GB SE

(59) Date of deferred publication of the search report:
22.05.91 Bulletin 91/21

(71) Applicant: **NEC CORPORATION**
7-1, Shiba 5-chome Minato-ku
Tokyo 108-01(JP)

(72) Inventor: **Takeuchi, Takao c/o NEC Corporation**
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)
Inventor: **Suzuki, Hiroshi c/o NEC Corporation**
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)
Inventor: **Iwasaki, Susumu c/o NEC Corporation**
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)
Inventor: **Nagano, Hiroshi c/o NEC Corporation**
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)
Inventor: **Suzuki, Toshio c/o NEC Corporation**
33-1, Shiba 5-chome
Minato-ku Tokyo(JP)

(74) Representative: **Vossius & Partner**
Siebertstrasse 4 P.O. Box 86 07 67
W-8000 München 86(DE)


(54) **Packet switch suitable for integrated circuit implementation.**

(57) The invention relates to a packet switch for exchanging packets received over a plurality of input lines (200) and outputting exchanged packets, to a plurality of output lines (213), comprising: multiplexing means (202) for time-division multiplexing the packets received over said plurality of input lines to multiplexed packets; address detecting means (204) for detecting an address of each packet in the multiplexed packets to produce a destination address; write address generating means (104) responsive to the destination address for generating write address; read address generating means (105) for sequentially generating read addresses;

memory means (103) constituted by a plurality of memory areas individually associated with said plurality of output lines, said memory means responsive to said write address for storing each packet of the multiplexed packets in any of said memory areas, and responsive to said read addresses for producing exchanged multiplexed packets by reading the stored packets; and demultiplexing means (212) for demultiplexing said exchanged multiplexed packets into said exchanged packets and delivering them to said plurality of output lines.

EP 0 338 558 A3

Fig. 6

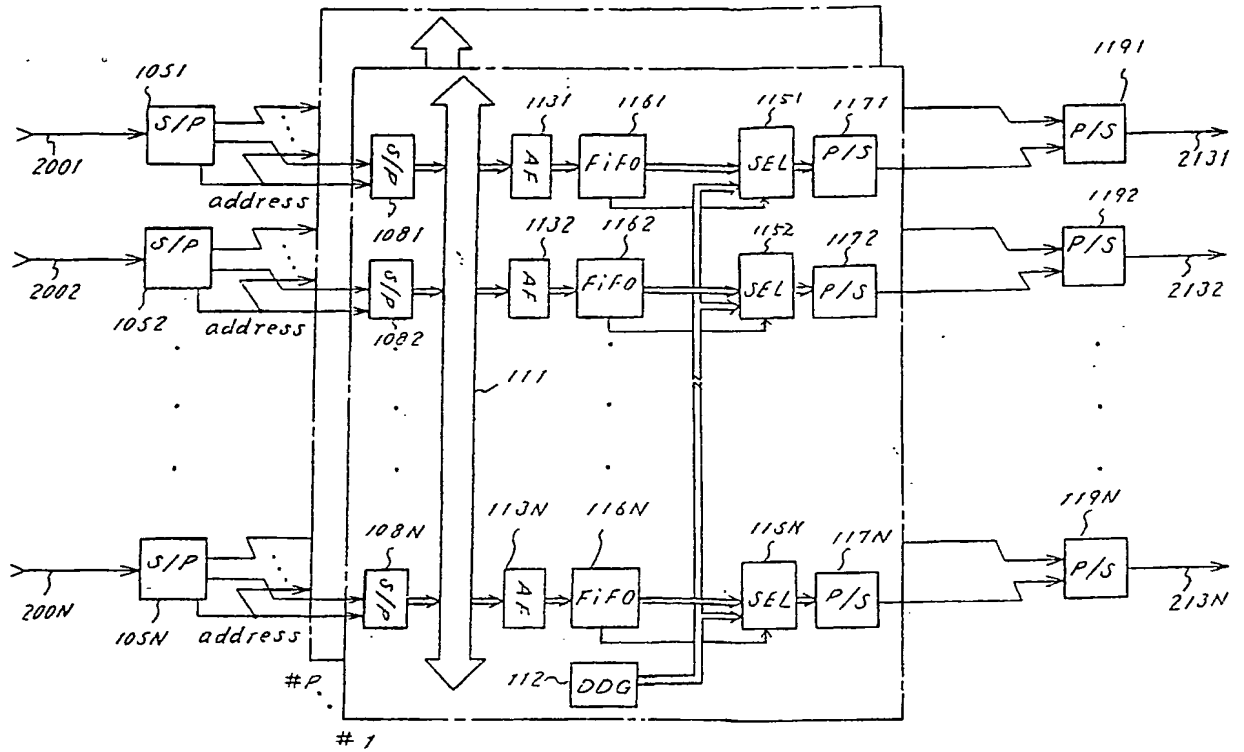



European
Patent Office

EUROPEAN SEARCH REPORT

Application Number

EP 89 10 7134

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	WO-A-8 704 579 (BELL TELEPHONE MANUFACTURE CO.) * Figure 1; page 2, lines 13-24; page 5, line 19 - page 6, line 14; page 7, lines 12-17; page 9, lines 16-22 * - - - -	1-4	H 04 L 11/20
A		5	
A	EP-A-0 257 816 (AMERICAN TELEPHONE AND TELEGRAPH CO.) * Figures 1,10; claims 1-4 * - - - - -	1-6	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			H 04 L
The present search report has been drawn up for all claims			
Place of search		Date of completion of search	Examiner
The Hague		22 February 91	PEREZ PEREZ J.C.
<div>CATEGORY OF CITED DOCUMENTS</div> <div>X: particularly relevant if taken alone</div> <div>Y: particularly relevant if combined with another document of the same category</div> <div>A: technological background</div> <div>O: non-written disclosure</div> <div>P: intermediate document</div> <div>T: theory or principle underlying the invention</div> <div>E: earlier patent document, but published on, or after the filing date</div> <div>D: document cited in the application</div> <div>L: document cited for other reasons</div> <div>&: member of the same patent family, corresponding document</div>			

